








### Features:

- Pure sine wave output
- Power ON / OFF remote control (Green Terminal)
- Remote controller CR-8 / CR-16A (optional)
- Input & Output fully isolation
- Temperature & Load controlled cooling fan
- Built in advance microprocessor to provide friendly interface
- Output frequency 50 / 60 Hz selectable by DIP switch
- Output voltage DIP switch selectable
- Adjustable power saving mode by variable resistor
- 3-color LED status indicators
- Input protection: Reverse Polarity (Fuse) / Under Voltage / Over Voltage
- Output protection: Short Circuit / Overload / Over Temperature
- E13 / UL / CE / FCC approved



| MODEL            |                                  | SP-2000-112   | SP-2000-124    | SP-2000-148  | SP-2000-212  | SP-2000-224  | SP-2000-248    |
|------------------|----------------------------------|---|----------------|--|--|--|----------------|
| Output           | AC Voltage                       | 100 / 110 / 115 / 120VAC  |                |  | 200 / 220 / 230 / 240VAC   |  |                |
|                  | AC Regulation                    | ±5%   |                |  | ±3%  |  |                |
|                  | Rated Power                      | 2000VA  |                |  |  |  |                |
|                  | Surge Power ( Max.3 Sec )        | <3500VA   |                |  |  |  |                |
|                  | Maximum Output Power (1 Min)     | >2000VA~2300VA (100%~115%)  |                |  |  |  |                |
|                  | Output Waveform                  | Pure Sine Wave (THD<5%@Normal Load NOTE1)   |                |  | Pure Sine Wave (THD<3%@Normal Load NOTE2)  |  |                |
|                  | Frequency                        | 50 / 60 Hz ±0.5%  |                |  |  |  |                |
| Input            | DC Voltage                       | 12VDC   | 24VDC          | 48VDC  | 12VDC  | 24VDC  | 48VDC          |
|                  | Voltage Range                    | 10.5 ~ 16.5VDC  | 21.0 ~ 33.0VDC | 42.0 ~ 66.0VDC   | 10.5 ~ 16.5VDC   | 21.0 ~ 33.0VDC   | 42.0 ~ 66.0VDC |
|                  | NO Load Current                  | ≤1.8A@12VDC   | ≤1.0A@24VDC    | ≤0.5A@48VDC  | ≤1.8A@12VDC  | ≤1.0A@24VDC  | ≤0.5A@48VDC    |
|                  | Power Saving Mode                | <0.1A@12VDC   | <0.05A@24VDC   | <0.05A@48VDC   | <0.1A@12VDC  | <0.05A@24VDC   | <0.05A@48VDC   |
|                  | Efficiency (Max.)                | 92%   | 93%            | 94%  | 94%  | 94%  | 95%            |
| Protection       | Input Under - Voltage Protection | 10.5 ±0.3VDC  | 21.0 ±0.5VDC   | 42.0 ±1.0VDC   | 10.5 ±0.3VDC   | 21.0 ±0.5VDC   | 42.0 ±1.0VDC   |
|                  | Input Under - Voltage Recovery   | 12.5 ±0.3VDC  | 25.0 ±0.5VDC   | 50.0 ±1.0VDC   | 12.5 ±0.3VDC   | 25.0 ±0.5VDC   | 50.0 ±1.0VDC   |
|                  | Input Over - Voltage Protection  | 16.5 ±0.3VDC  | 33.0 ±0.5VDC   | 66.0 ±1.0VDC   | 16.5 ±0.3VDC   | 33.0 ±0.5VDC   | 66.0 ±1.0VDC   |
|                  | Input Over - Voltage Recovery    | 14.5 ±0.3VDC  | 29.0 ±0.5VDC   | 58.0 ±1.0VDC   | 14.5 ±0.3VDC   | 29.0 ±0.5VDC   | 58.0 ±1.0VDC   |
|                  | Output Overload                  | Shutdown output voltage, restart to recover   |                |  |  |  |                |
|                  | Output Short                     | Shutdown output voltage, restart to recover   |                |  |  |  |                |
|                  | Over Temperature                 | Heat sink temperature over 80°C ±5°C, shutdown output voltage, recover automatically after heat sink temperature goes down to 60°C ±5°C |                |  |  |  |                |
| Environment      | DC Input Reverse Polarity        | By fuse   |                |  |  |  |                |
|                  | Operating Temp.                  | -20°C ~ +40°C ; 60°C @40% power load  |                |  |  |  |                |
|                  | Storage Temp.                    | -30°C ~ +70°C   |                |  |  |  |                |
| Safety & EMC     | Storage Temp. & Humidity         | 10 ~ 95% RH   |                |  |  |  |                |
|                  | Safety Standards                 | Certified UL 458 NOTE3  |                |  | ----   | Certified EN 60950-1   |                |
|                  | EMC Standards                    | Certified FCC class A NOTE4   |                |  | Certified EN 55022 class A NOTE4 ; EN 55024<br>EN 61000-3-2, -3-3<br>EN 61000-4-2, 3, 4, 5, 6, 8, 11 |  |                |
| Control & Signal | E-mark                           | ----  |                |  | Certified CISPR 25<br>ISO 7637-2   |  |                |
|                  | Accessory (Optional)             | Remote Control: CR-8 / CR-16A; Transfer Switch: TR-40   |                |  |  |  |                |
|                  | LED Indicator                    | Input voltage level, output load level and faulty status  |                |  |  |  |                |
|                  | Dry Contact Terminal             | By relay  |                |  |  |  |                |
| Others           | Remote Control Terminal          | 6-port green terminal   |                |  |  |  |                |
|                  | Dimension (W x H x D)            | 248x83x443 mm / 9.76x3.27x17.44 inch  |                |  |  |  |                |
|                  | Packing                          | 5.24kg; 4pcs / 21.96kg / 3.58CUFT   |                |  |  |  |                |
|                  | Cooling                          | Temperature & load controlled cooling fan   |                |  |  |  |                |
|                  | Application                      | Home and office appliances, portable power equipment, vehicle, yacht and off-grid Solar power systems ...etc.                           |                |  |  |  |                |
| Socket Type      |                                  | <br>North America<br>(GFCI)                          |                | <br>North America<br>(NEMA 5-20R) |  |     <br>Continental<br>European<br>(SCHUKO) |                |
|                  |                                  |   |                |  |  |  |                |


Note1 - Normal Condition: Vin=12.5V / 25V / 50V Vo=100 / 110 / 115 / 120 VAC 80% Full load (PF=1.0)

Note2 - Normal Condition: Vin=12.5V / 25V / 50V Vo=200 / 220 / 230 / 240 VAC 80% Full load (PF=1.0)


Note3 - UL only for GFCI receptacles

Note4 - Warning: This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

### Mechanical Drawings:

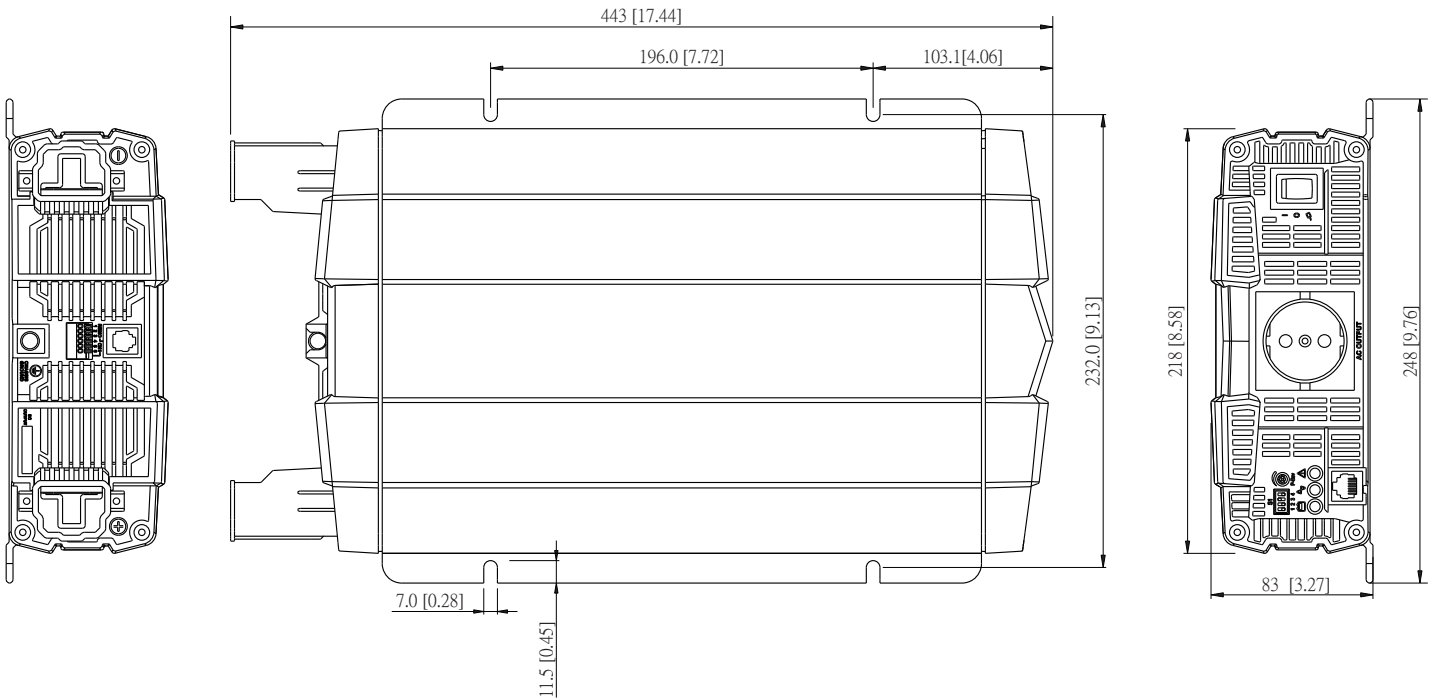

### Power Voltage Curve:

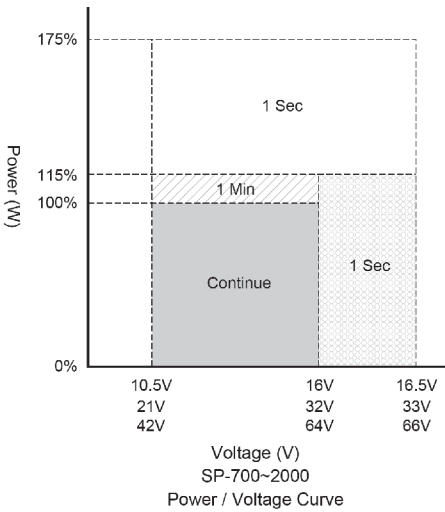

### Power Temperature Curve:

